


# WILTON POWRARM WELDING POSITIONER

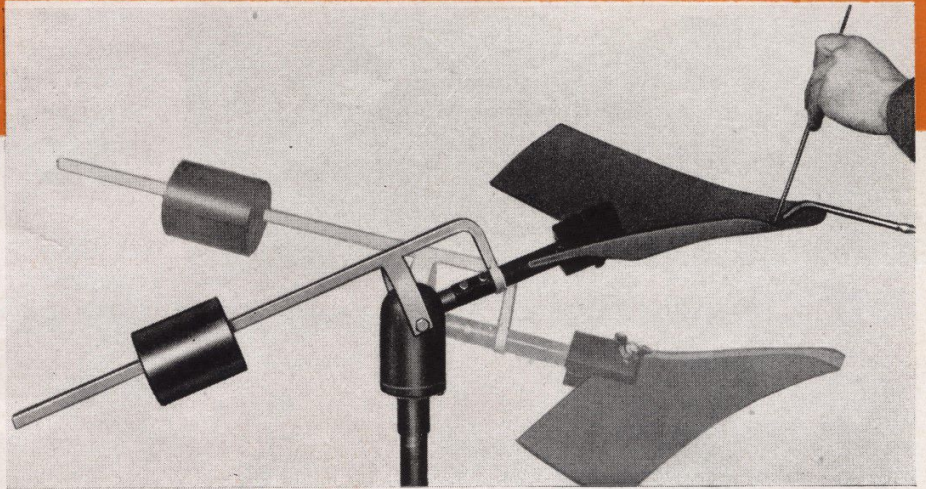

## A TWIST OF THE WRIST TURNS WORK TO MOST CONVENIENT WELDING POSITION

**Nothing to Tighten — Holds pieces up to 50 lbs.**


In welding or hard-facing, it is important that the work be positioned as rapidly as possible so that the hard metal can be applied in a flat position and the job completed without loss of time. This is especially important when the part must be turned two or three times during the welding operation. With the Powrarm the operator not only saves time, but he also saves expensive gases.

The Powrarm Welding Positioner is designed for full universal movement. It is easily operated—all that is necessary is to mount the work, set the counter weight and turn the work to a convenient flat welding position. Movement is under spring tension which is adjustable to compensate for wear after long periods of use.

Powrarm Model 334 is furnished with heavy duty clamp as illustrated and which holds flat work up to 1" thick. Protective fireproof spatter shield furnished but not shown.


**WILTON TOOL MFG. CO.**

936 WRIGHTWOOD AVENUE + CHICAGO 14, ILL.

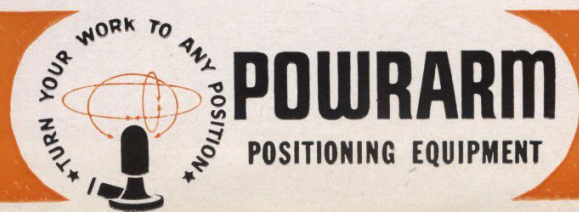

**POWRARM**  
POSITIONING EQUIPMENT




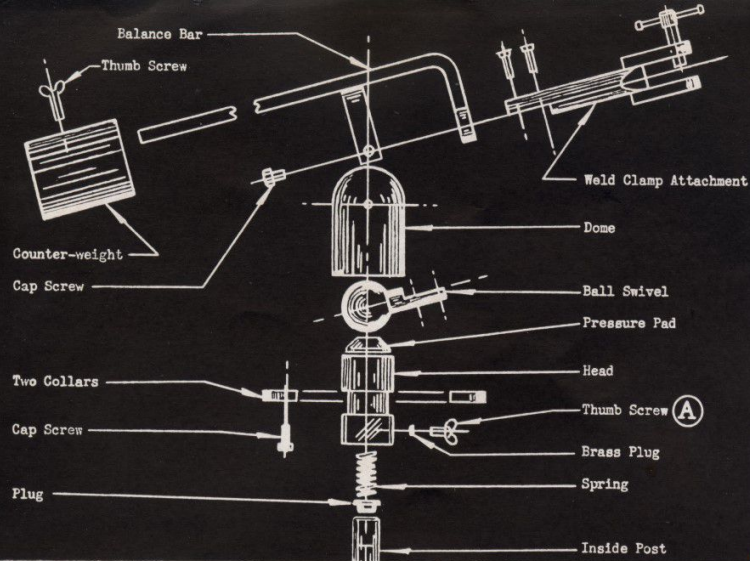

Loosening thumb screw and turning dome assembly on pipe standard regulates spring pressure on ball swivel. This adjustment, which is necessary only after long periods of use or for operation at maximum capacity, applies sufficient pressure on ball swivel, so that balance bar will hold in position placed by operator.


## POWRARM — ALSO AVAILABLE FOR BENCH WORK

Powrarm Model 301



Mechanical lock holds work up to 70 lbs.

Powrarm Model 303



Hydraulically operated. Holds work up to 150 lbs.

Wilton Clamp Base Model 347



For clamping Powrarm models 301 or 303 to bench or truck.

## WELDING ACCESSORIES FOR MODEL 334, 301 AND 303 POWRARMS



Welding Plate Adapter. Model 324. Size 4"x8". Used with "C" Clamp to hold work in welding position.



T-Slot Table with Universal Clamps. Model 327. For general welding and assemblies 10" in diameter. Maximum thickness handled by clamp 2 3/4".



Hard Surfacing Adapter. Model 323 (left). Especially designed for plow shares, 3/8" capacity.



Heavy Duty Clamp (right). For holding work. Model 339. Capacity 1".

### PRICES

	Catalog No.	Weight	Code	Price
Powrarm Welding Positioner.....	334	43 lbs.	WESET	38.50
Powrarm (Mechanical Type).....	301	8 lbs.	POMEC	19.80
Powrarm (Hydraulic Type).....	303	14 lbs.	POHYD	28.50
Powrarm Base Clamp.....	347	4 1/2 lbs.	PACLA	3.20
Welding Plate Adapter.....	324	2 1/2 lbs.	GEPLA	2.20
T-Slot Table.....	327	12 lbs.	SLOTA	9.00
Hard Surfacing Adapter.....	323	4 lbs.	WECLA	2.80
Heavy Duty Clamp—Capacity up to 1" thickness.....	339	3 lbs.	CLATO	3.60
Spatter shield, not illustrated.....	337	5 oz.	WPFSH	1.50

Powrarm Equipment is Sold and Recommended by